

# 1400 Square Minisize T5/LED



## IP 20

### Order Code Highlights:

(See attached order code matrix for all options. A complete order code consists of 20 digits.)

MODEL NUMBER (AAAA)

1400

MOUNTING (BB)

Mounting Bracket (77)

Mounting Cubes (78)

LAMP TYPE (CC)

T5 (02)

LED (10)

EXTRUSION COLOR (G)

Clear Anodized (1)

White (2)

Custom (3)

SHIELDING (H)

Frosted Acrylic Lens (2)

POWERFEED (J)


Cord and Plug (1)

Conduit - End of Ballast Box (3)

BALLAST/DRIVER (K)

Non-dimming (1)

Dimming 0-10 Volt Analog (8)

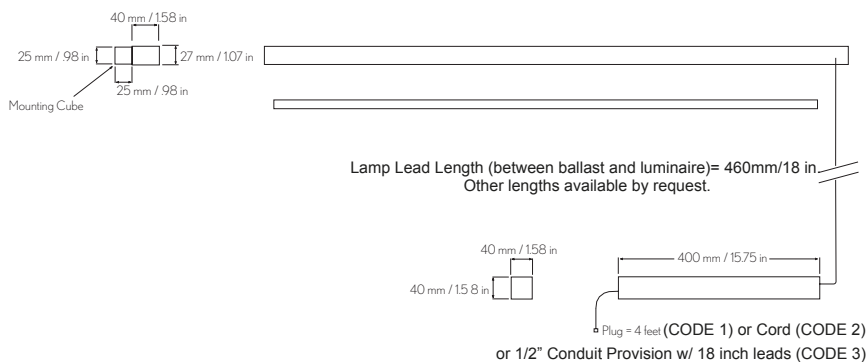

Order Code AAAA BB CC DD EE or EE F G H I J K L M	Length (L)	Lamp
1400 xx 02 01 06 or 09 x x 2 x x x x x	605mm/23.82 in.	T5/T5HO 14 or 24 Watts
1400 xx 02 01 08 or 13 x x 2 x x x x x	905mm/35.63 in.	T5/T5HO 21 or 39 Watts
1400 xx 02 01 10 or 16 x x 2 x x x x x	1205mm/47.44 in.	T5/T5HO 28 or 54 Watts
1400 xx 02 01 11 x x 2 x x x x x	1505mm/59.25 in.	T5 35 Watts
1400 xx 02 02 08 or 13 x x 2 x x x x x	1805mm/71.06 in.	T5/T5HO 2 x 21 or 39 Watts
1400 xx 02 02 10 or 16 x x 2 x x x x x	2405mm/94.69 in.	T5/T5HO 2 x 28 or 54 Watts
1400 xx 02 02 11 x x 2 x x x x x	3005mm/118.31 in.	T5 2 x 35 Watts

Other lengths available by request.  
Length includes end caps.

LED extrusion length starts at nominal 125mm/5 inches and increases in combinations of nominal 100mm/4 in. and 255mm/10 in. increments. Each 4 in. increment is 1.8 Watts (1/2 power) and 3.6 Watts (full power); each 10 in. increment is 4.2 Watts (1/2 power) and 8.4 Watts (full power). Driver dimensions vary according to Wattage capacity.  
**LED Engine: Osram Sylvania HF2 Narrow Stick.**




[www.smedmarksinc.com](http://www.smedmarksinc.com)

**EFFICIENT VERSATILE ADAPTABLE CUSTOMIZABLE**

# 1400 Square Minisize T5/LED



Polar Graph

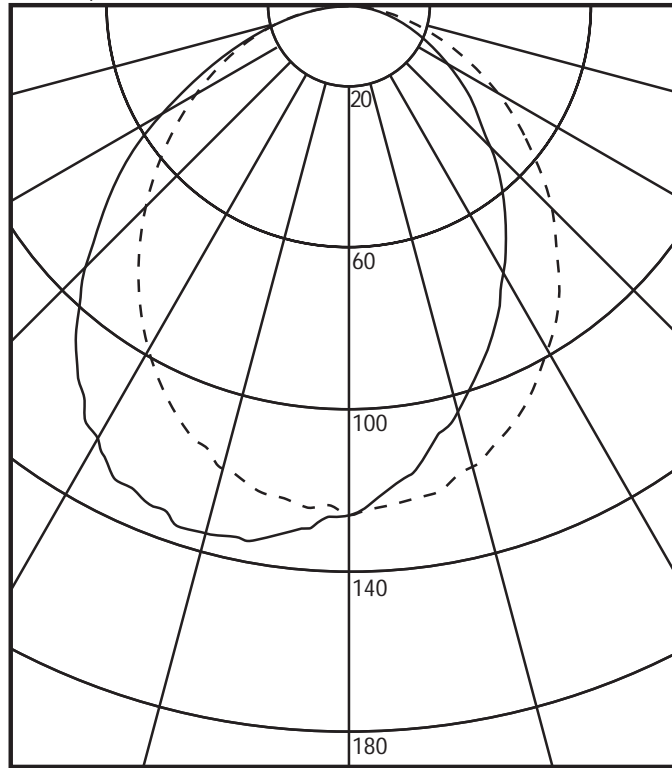

Frosted Lens with 1x28 Watt T5 Lamp



**EFFICIENT    VERSATILE    ADAPTABLE    CUSTOMIZABLE**



## ORDER/SPECIFICATION CODE MATRIX

Complete Code = AAAABBCDEEEFGHIJKLM (20 Digits)

AAAA	BB	CC	D	EEE	F	G	H	I	J	K	L	M
PRODUCT CODE	MOUNTING	LAMP TYPE	LED ENGINE	NOMINAL LUMINAIRE LENGTH INCHES	LAMP COLOR	EXTRUSION COLOR	SHIELDING	ENDCAP	POWER FEED	DIMMING	EMERGENCY	OTHER
1400	01=Custom 77=Bracket 78=Cubes	10=LED	1=HF2 1/2 Pwr 2=HF2 Full Pwr	005=5 inches 009=9 inches 013=13 inches 015=15 inches 017=17 inches 019=19 inches 021=21 inches etc.	1=827 2=830 3=835 4=841	1=Clear Anodized 2=White 3=Custom	2=Acrylic Lens Frosted	1=Custom 2=Blue Translucent 3=White Translucent 4=White Opaque 5=Red Translucent 6=Gray Plastic 7=Gray Aluminum 8= White Aluminum	1=Plug 2=Cord 3=Conduit End 5=Conduit Top	1=Non-Dimming 8=Dim 0-10V Univ	1=Non-Emergency	0=Standard
	<b>See Separate Page For Illustrations</b>			<b>Combinations of 4 and 10 in. Plus 1 Inch</b>					<b>See Separate Page For Illustrations</b>			

$\frac{1}{A}$ 
 $\frac{4}{A}$ 
 $\frac{0}{A}$ 
 $\frac{0}{A}$ 
 $\frac{\quad}{B}$ 
 $\frac{\quad}{B}$ 
 $\frac{1}{C}$ 
 $\frac{0}{C}$ 
 $\frac{\quad}{D}$ 
 $\frac{\quad}{E}$ 
 $\frac{\quad}{E}$ 
 $\frac{\quad}{E}$ 
 $\frac{\quad}{F}$ 
 $\frac{\quad}{G}$ 
 $\frac{2}{H}$ 
 $\frac{\quad}{I}$ 
 $\frac{\quad}{J}$ 
 $\frac{\quad}{K}$ 
 $\frac{1}{L}$ 
 $\frac{0}{M}$

