

1510 Pendel Arc Minisize T5



IP 20

Order Code Highlights:

(See attached order code matrix for all options. A complete order code consists of 20 digits.)

MODEL NUMBER (AAAA)
1510

MOUNTING (BB)
Standard Suspension (as shown) (00)
Aircraft Cable Suspension (for detached ballast) (03)


LAMP TYPE (CC)
T5 (02)

EXTRUSION COLOR (G)
Clear Anodized (1)
White (2)
Custom (3)

SHIELDING (H)
Linear Spread Acrylic Lens (1)
Metal Louver (3)

POWERFEED (J)
Cord and Plug (1)
Cord (2)
Conduit - End of Ballast Box (3)
1/8 IP Tube (centered top of ballast box) (4)
Conduit - Top of Ballast Box (5)

BALLAST/DRIVER (K)
Non-dimming (1)
Dimming 0-10 Volt Analog (8)

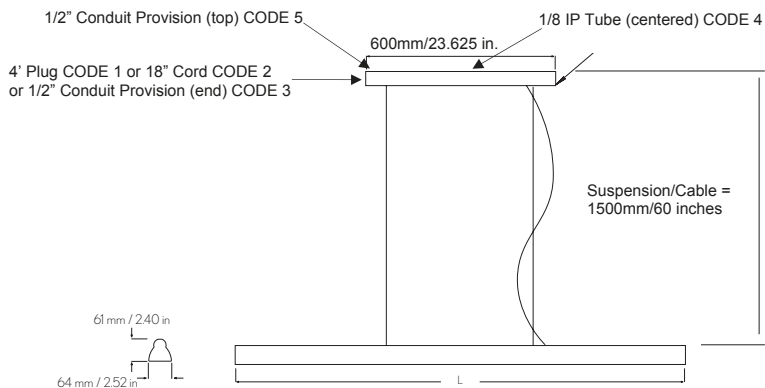

Order Code	Length (L)	Lamp
AAAA BB CC DD EE or EE F G H I J K L M		
1510 xx 02 01 06 or 09 x x x x x x x x	605mm/23.82 in.	T5/T5HO 14 or 24 Watts
1510 xx 02 01 08 or 13 x x x x x x x x	905mm/35.63 in.	T5/T5HO 21 or 39 Watts
1510 xx 02 01 10 or 16 x x x x x x x x	1205mm/47.44 in.	T5/T5HO 28 or 54 Watts
1510 xx 02 01 13 x x x x x x x x	1505mm/59.25 in.	T5 35 Watts
1510 xx 02 02 08 or 13 x x x x x x x x	1805mm/71.06 in.	T5/T5HO 2 x 21 or 39 Watts
1510 xx 02 02 10 or 16 x x x x x x x x	2405mm/94.69 in.	T5/T5HO 2 x 28 or 54 Watts
1510 xx 02 02 13 x x x x x x x x	3005mm/118.31 in.	T5 2 x 35 Watts

Other lengths available by request.
Length includes end caps.


www.smedmarksinc.com

EFFICIENT VERSATILE ADAPTABLE CUSTOMIZABLE



1510 Pendel Arc Minisize T5



POLAR GRAPH

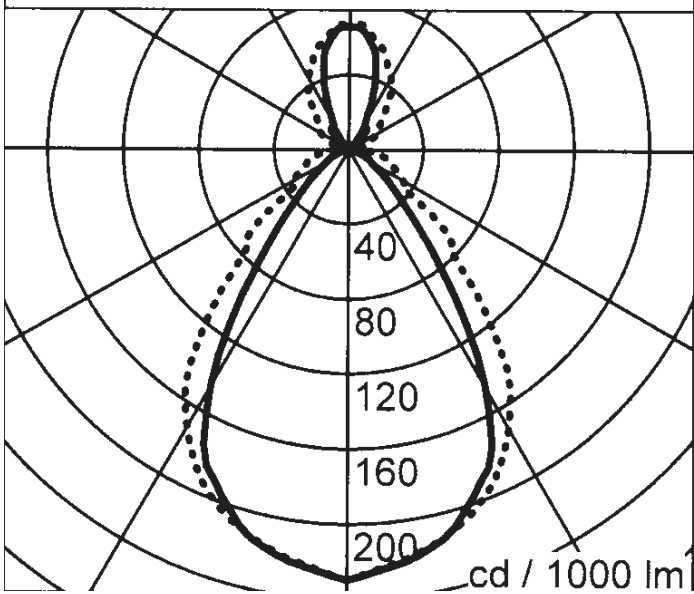

Linear Spread Lens with T5 Lamp

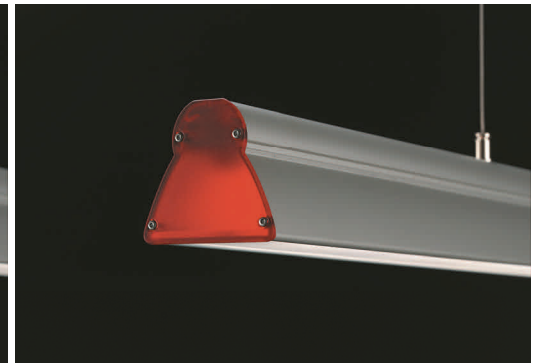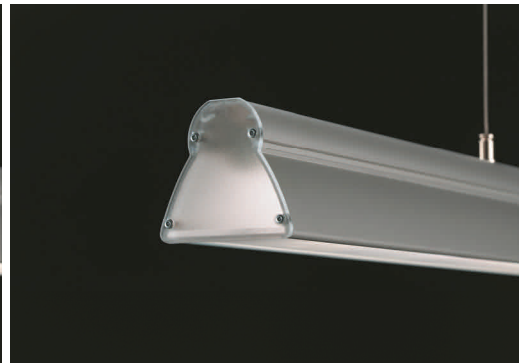

EFFICIENT VERSATILE ADAPTABLE CUSTOMIZABLE

ORDER/SPECIFICATION CODE MATRIX

Complete Code = AAAABBCCDDEEFGHIJKLM (20 Digits)

AAAA	BB	CC	DD	EE	F	G	H	I	J	K	L	M
PRODUCT CODE	MOUNTING	LAMP TYPE	LAMP QTY	LAMP WATTS	LAMP COLOR	EXTRUSION COLOR	SHIELDING	ENDCAP	POWER FEED	BALLAST TYPE	EMERGENCY	OTHER
1510	00=Standard 01=Custom 03=A/C Cable w/ Canopy (For Mounting Remote Ballast Away From Luminaire) 41=C-Clamp 42=C-Clamp 43=C-Clamp 44=C-Clamp 45=Aimable 46=Aimable 47=Aimable 48=Aimable 49=A/C Cable w/ C-Clamp 50=A/C Cable Aimable	02=T5	01=1 02=2 03=3 etc.	01=6 02=8 04=11 05=13 06=14 08=21 09=24 10=28 11=35 13=39 16=54	2=830 3=835 4=841 5=850 6=865 7=Red 8=Green 9=Blue	1=Clear Anodized 2=White 3=Custom	1=Acrylic Lens Linear Spread 3=Metal Louver	1=Custom 2=Blue Translucent 3=White Translucent 4=White Opaque 5=Red Translucent 6=Gray Plastic 7=Gray Aluminum 8= White Aluminum	1=Plug 2=Cord 3=Conduit End 5=Conduit Top	1=Non-dimming Univ Volts 2=Dimming ECO 120V 3=Dimming Hi-Lume 120V 4=Dimming ECO 277V 5=Dimming Hi-Lume 277V 6=Dimming Stepped Univ 7=Dimming DALI Univ 8=Dimming 0-10V Univ 9=Dimming Powerline Univ	1=Non-Emergency 2=Standard 120V 3=Standard 277V 4=Self-Diag 120V 5=Self-Diag 277V	0=Standard 1=Ecosystem Type 1 2=Ecosystem Type 2 3=Ecosystem Type 3

See Separate Page For Illustrations

See Separate Page For Illustrations

1 5 1 0 0 2

A A A A B B C C D D E E F G H I J K L M

