

8300 Pole 64 Clear Minisize T5



IP 67

Order Code Highlights:

(See attached order code matrix for all options. A complete order code consists of 20 digits.)

MODEL NUMBER (AAAA)
8300

MOUNTING (BB)
Custom (01)
Stainless Clamp Bracket (27)

LAMP TYPE (CC)
T5 (02)

EXTRUSION COLOR (G)
White (2)



SHIELDING (H)
None (0)

END CAP (I)
Standard (0)
Custom Color (1)


POWERFEED (J)
Cord with Plug (1)
Cord (2)
Conduit - End (3)

BALLAST/DRIVER (K)
Non-dimming (1)
Dimming 0-10 Volt Analog (8)

EMERGENCY (L)
Non-emergency (1)
Emergency 120 Volt (2)
Emergency 277 Volt (3)
(Emergency not available for the 14 or 24 Watt model)



Mounting bracket MTO026



Order Code AAAA BB CC DD EE/EE F G H I J K L M	Length (L)	Lamp
8300 xx 02 01 06/09 x 2 0 x x x 1 x	664mm/26.14 in.	T5/T5HO 14/24 Watts
8300 xx 02 01 08/13 x 2 0 x x x x x	964mm/37.55 in.	T5/T5HO 21/39 Watts
8300 xx 02 01 10/16 x 2 0 x x x x x	1264mm/49.76 in.	T5/T5HO 28/54 Watts
8300 xx 02 01 13 x 2 0 x x x x x	1564mm/61.57 in.	T5 35 Watts
8300 xx 02 02 08/13 x 2 0 x x x x x	1864mm/73.39 in.	T5/T5HO 2 x 21/39 Watts
8300 xx 02 02 10/16 x 2 0 x x x x x	2464mm/97.01 in.	T5/T5HO 2 x 28/54 Watts

Other lengths available by request.
Length includes end caps.




www.smedmarksinc.com

EFFICIENT VERSATILE ADAPTABLE CUSTOMIZABLE

8300 Pole 64 Clear Minisize T5



POLAR GRAPH

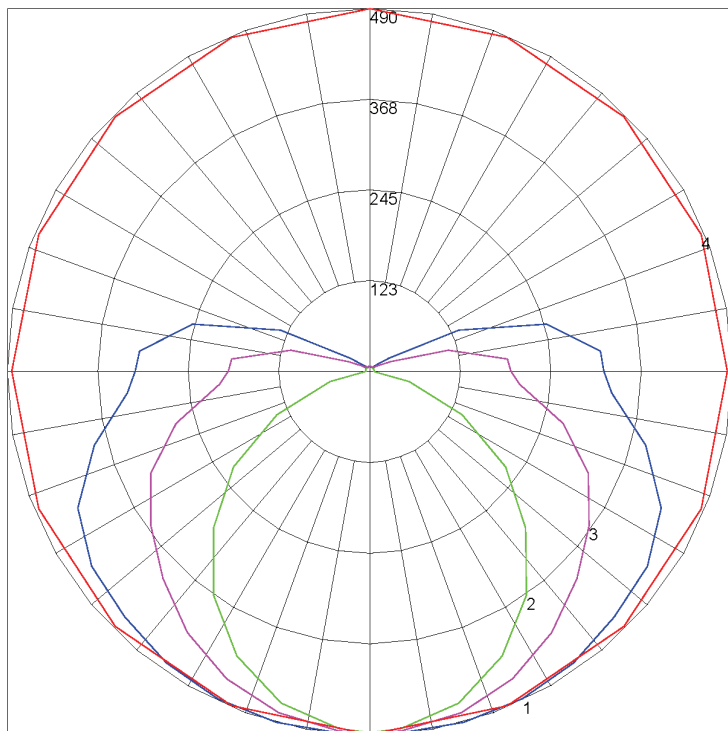

Maximum Candela = 490 Located At Horizontal Angle = 90, Vertical Angle = 5
1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.) : BLUE
2 - Vertical Plane Through Horizontal Angles (0 - 180) : GREEN
3 - Vertical Plane Through Horizontal Angles (45 - 225) : MAGENTA
4 - Horizontal Cone Through Vertical Angle (5) (Through Max. Cd.) : RED

Clear Tube with 1x28 Watt T5 Lamp



EFFICIENT VERSATILE ADAPTABLE CUSTOMIZABLE

POLE 64 CLEAR IP 67 MINISIZE T5

PRODUCT CODE
8300

ORDER/SPECIFICATION CODE MATRIX

Complete Code = AAAABBCCDDEEFGHIJKLM (20 Digits)

AAAA	BB	CC	DD	EE	F	G	H	I	J	K	L	M
PRODUCT CODE	MOUNTING	LAMP TYPE	LAMP QTY	LAMP WATTS	LAMP COLOR	EXTRUSION COLOR	SHIELDING	ENDCAP	POWER FEED	BALLAST TYPE	EMERGENCY	OTHER
8300	01=Custom 27=Stainless Bracket	02=T5	01=1 02=2	01=6 02=8 04=11 05=13 06=14 08=21 09=24 10=28 11=35 13=39 16=54	2=830 3=835 4=841 5=850 6=865 7=Red 8=Green 9=Blue	2=White	0=None	0=Standard 1=Custom	1=Plug 2=Cord 3=Conduit - End	1=Non-dimming Univ Volts 2=Dimming ECO 120V 3=Dimming Hi-Lume 120V 4=Dimming ECO 277V 5=Dimming Hi-Lume 277V 6=Dimming Stepped Univ 7=Dimming DALI Univ 8=Dimming 0-10V Univ 9=Dimming Powerline Univ	1=Non-Emergency 2=Standard 120V 3=Standard 277V 4=Self-Diag 120V 5=Self-Diag 277V	0=Standard 1=Ecosystem Type 1 2=Ecosystem Type 2 3=Ecosystem Type 3
	See Separate Page For Illustrations								See Separate Page For Illustrations			See Separate Page For Illustrations

8 3 0 0 0 2 2 0

A A A A B B C C D D E E F G H I J K L M



Smedmarks Inc.
190 Muttart Rd.
Neenah, WI 54956-9710 USA
(920) 751-0323
www.smedmarksinc.com