



# INLINE

## IP20

Aluminium  
Acrylic linear spread lens  
Internal HF-ballast  
Downlight  
Uplight

## POWER FEED

Hard wired

## MOUNTING

Pendant, ceiling, wall

## LIGHTSOURCE

T5 tube

## OPTIONS

Dimming (one lamp only)  
H.O. lamps




## COLORS

Grey (N)  
White (V)

Art	Name	L
IN0114	Inline "Wallwasher" 14 W	605 mm / 23.82 in
IN01121	Inline "Wallwasher" 21 W	905 mm / 35.63 in
IN01128	Inline "Wallwasher" 28 W	1205 mm / 47.44 in
IN01135	Inline "Wallwasher" 35 W	1505 mm / 59.25 in
IN01221	Inline "Wallwasher" 2x21 W	1805 mm / 71.06 in
IN01228	Inline "Wallwasher" 2x28 W	2405 mm / 94.68 in
IN01235	Inline "Wallwasher" 2x35 W	3005 mm / 118.31 in
IN03121	Inline Pendant 21 W	905 mm / 35.63 in
IN03128	Inline Pendant 28 W	1205 mm / 47.44 in
IN03135	Inline Pendant 35 W	1505 mm / 59.25 in
IN03228	Inline Pendant 2x28 W	2405 mm / 94.68 in
IN21221	Inline "Lightengine" 2x21 W	905 mm / 35.63 in
IN21228	Inline "Lightengine" 2x28 W	1205 mm / 47.44 in
IN21235	Inline "Lightengine" 2x35 W	1505 mm / 59.25 in
<b>INLINE</b>		
IN0002	Suspension wire	1500 mm / 59.06 in
IN0006	L-bracket	150 mm / 5.91 in
IN0008	Straight bracket	125 mm / 4.92 in

Length includes endcaps.

# INLINE

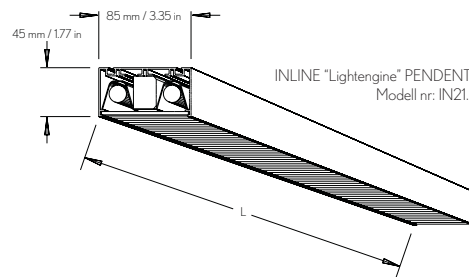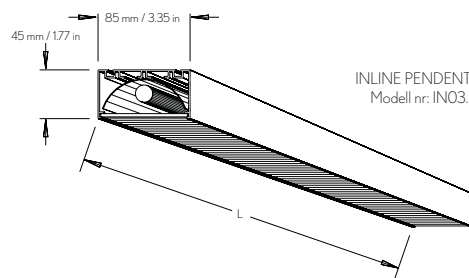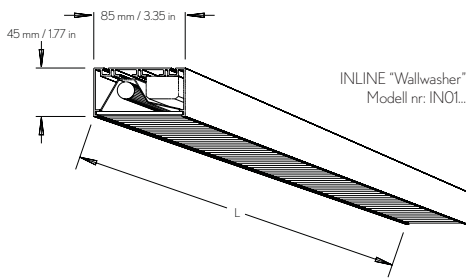

# INLINE ACCESSORIES

