



ROUNABOUT

IP 20
Aluminium, polycarbonate, acrylic satin
External electronic ballast


POWER FEED
Hardwire cord

LIGHTSOURCE
T5 tube

MOUNTING
Ceiling/wall/pendant


OPTIONAL
Glass Shade
H.O. lamps
Hardwire flex conduit
Cord with plug

COLORS
Grey (N)
White (W)

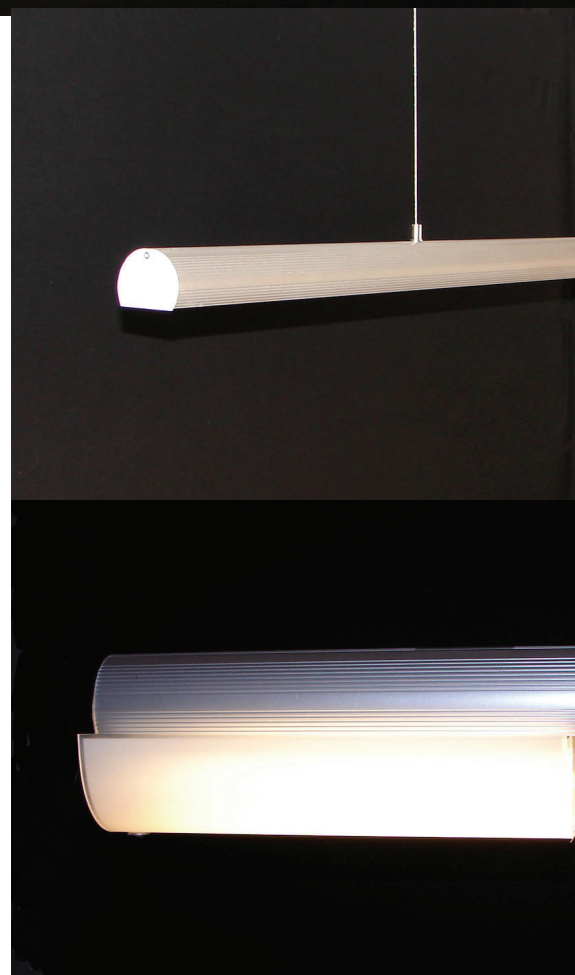

 SMEDMARKS

www.smedmarksinc.com

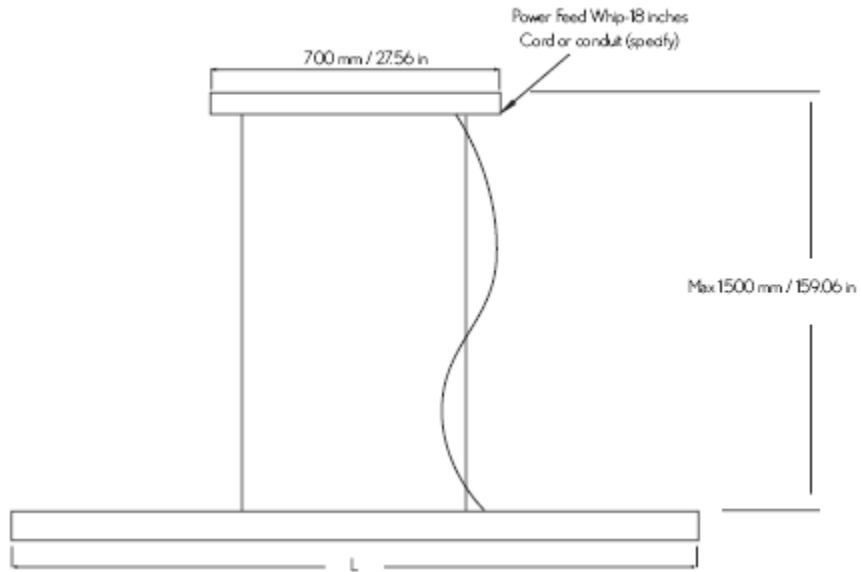


Art	Name	L	Type
MRA14	Roundabout	605 mm / 23.02 in	14 W/830
MRA21	Roundabout	905 mm / 35.63 in	21 W/830
MRA28	Roundabout	1205 mm / 47.44 in	28 W/830
MRA35	Roundabout	1505 mm / 59.25 in	35 W/830
MRA221	Roundabout	1805 mm / 71.06 in	2x21 W/830
MRA228	Roundabout	2405 mm / 94.69 in	2x28 W/830
MRA235	Roundabout	3005 mm / 118.31 in	2x35 W/830

Other length on request. Length includes endcaps.

Profile Measurements: 56 mm/2.25 in. (W) x 42 mm/1.65 in. (H)

LIGHT OUTPUT

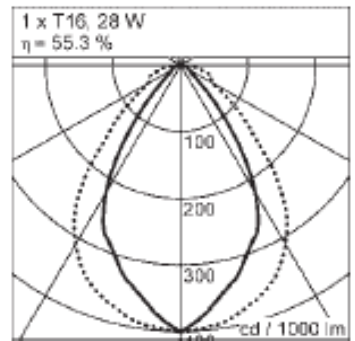

LINEAR SPREAD LENS