


1405 Square Pentry Minisize T5



POLAR GRAPH

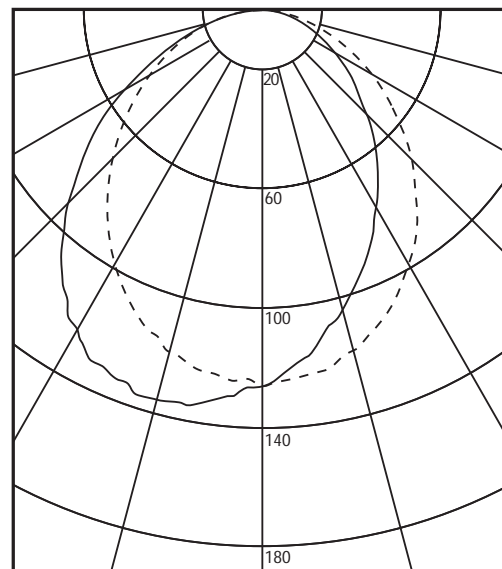

Frosted Lens with 1x28 Watt T5 Lamp

IP 20

Order Code Highlights:

(See attached order code matrix for all options. A complete order code consists of 20 digits.)

MODEL NUMBER (AAAA)
1405

MOUNTING (BB)
Mounting Bracket (77)
Mounting Cubes (78)


LAMP TYPE (CC)
T5 (02)

EXTRUSION COLOR (G)
Clear Anodized (1)
White (2)
Custom (3)

SHIELDING (H)
Frosted Acrylic Lens (2)

POWERFEED (J)
Cord and Plug (1)
Conduit - Back Of Luminaire (6)

BALLAST/DRIVER (K)
Non-dimming (1)

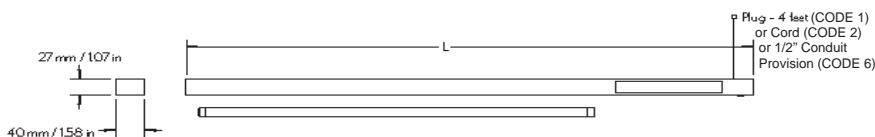

Order Code AAAA BB CC DD EE or EE F G H I J K L M	Length (L)	Lamp
1405 xx 02 01 06 or 09 x x 1 x x x 1 x	1005mm/39.57 in.	T5/T5HO 14 or 24 Watts
1405 xx 02 01 08 or 13 x x 1 x x x 1 x	1305mm/51.38 in.	T5/T5HO 21 or 39 Watts
1405 xx 02 01 10 or 16 x x 1 x x x 1 x	1605mm/63.19 in.	T5/T5HO 28 or 54 Watts
1405 xx 02 01 13 x x 1 x x x 1 x	1905mm/75.00 in.	T5 35 Watts
1405 xx 02 02 08 or 13 x x 1 x x x 1 x	2205mm/86.81 in.	T5/T5HO 2x21 or 39 Watts
1405 xx 02 02 10 or 16 x x 1 x x x 1 x	2805mm/110.43 in.	T5/T5HO 2x28 or 54 Watts
1405 xx 02 02 13 x x 1 x x x 1 x	3405mm/134.06 in.	T5 2 x 35 Watts

Other lengths available by request.
Length includes end caps.



www.smedmarksinc.com

EFFICIENT VERSATILE ADAPTABLE CUSTOMIZABLE

ORDER/SPECIFICATION CODE MATRIX

Complete Code = AAAABBCCDDEEFGHIJKLM (20 Digits)

AAAA	BB	CC	DD	EE	F	G	H	I	J	K	L	M
PRODUCT CODE	MOUNTING	LAMP TYPE	LAMP QTY	LAMP WATTS	LAMP COLOR	EXTRUSION COLOR	SHIELDING	ENDCAP	POWER FEED	BALLAST TYPE	EMERGENCY	OTHER
1405	01=Custom 77=Bracket 78=Cubes	01=T2 02=T5	01=1 02=2 03=3 etc.	01=6 02=8 04=11 05=13 06=14 08=21 09=24 10=28 11=35 13=39 16=54	2=830 3=835 4=841 5=850 6=865 7=Red 8=Green 9=Blue	1=Clear Anodized 2=White 3=Custom	2=Acrylic Lens Frosted	1=Custom 4=White Opaque 6=Gray Plastic	1=Plug 2=Cord 6=Conduit - Back	1=Non-Dim Univ Volt 2=Dim 10% 120V 3=Dim 1% 120V 4=Dim10% 277V 5=Dim 1% 277V 6=Cust Dim 120V 7=Cust Dim 277V 8=Dim 0-10V Univ 9=Stepped Dim Univ (T2 No Dimming) (T2 120 Volt Only)	1=Non-Emergency	0=Standard
	See Separate Page For Illustrations		T2 = Max. Two Lamps						See Separate Page For Illustrations			

1
4
0
5
—
—
—
—
—
—
—
—
2
—
—
—
1
0

A
A
A
A
B
B
C
C
D
D
E
E
F
G
H
I
J
K
L
M

